

Fittings - Barb Block

REINFORCED POLYPROPYLENE

Working pressure
Up to 14 BAR
(200 psi) at 20 °C

Temperature
4 °C - 90 °C
(subject to application)



Union Connector

Cat. No.	OD mm	L mm	SW	Colour
22046246008	6	32.7	14	Blue
22046248008	8	32.7	14	
22046252008	12	40.6	19	

Cat. No.	OD inch	L mm	SW	Colour
22046204008	¼"	32.7	14	Navy Blue
22046205008	⅜"	32.7	14	
22046208008	½"	40.6	19	

Cat. No.	OD inch	L mm	SW	Colour
22246204003	¼"	32.5	14	Gray
22246205003	⅜"	32.6	14	
22246208003	½"	40.4	19	

Note: Packing 25 unit

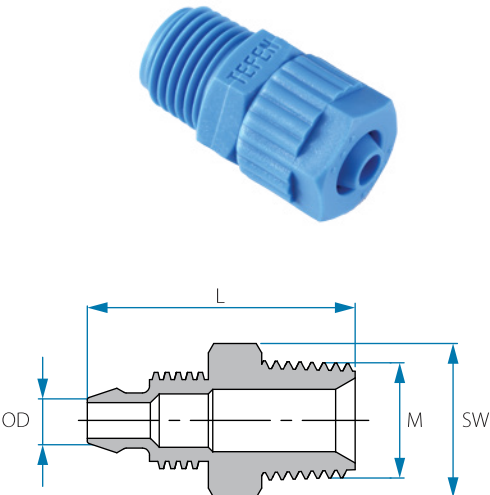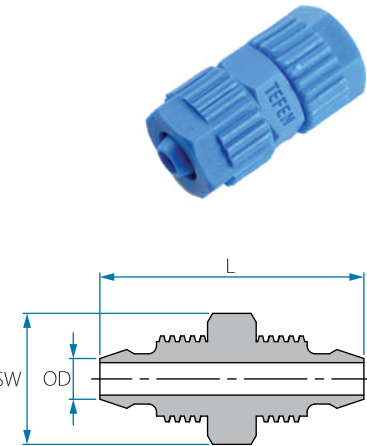

BSPT Male Connector


Cat. No.	OD mm	M (BSPT)	L mm	SW	Colour
22046846028	6	⅛"	27.5	13	Blue
22046846048	6	¼"	29.7	14	
22046846068	6	⅜"	32.5	17	
22046846088	6	½"	35.5	22	
22046846128	6	¾"	36.6	27	
22046848028	8	⅛"	27.6	13	
22046848048	8	¼"	29.5	14	
22046848068	8	⅜"	31.4	17	
22046848088	8	½"	36.1	22	
22046848128	8	¾"	36.6	27	
22046850048	10	¼"	35.8	17	
22046850068	10	⅜"	35.8	17	
22046850088	10	½"	38.9	22	
22046850128	10	¾"	39.7	27	
22046852048	12	¼"	37.3	14	
22046852068	12	⅜"	37.3	17	
22046852088	12	½"	40.1	22	
22046852128	12	¾"	40.1	27	
22046848022	8	⅛"	27.6	13	Black
22046852082	12	½"	40.1	22	

Reducing Connector

Cat. No.	OD mm	OD1 mm	L mm	SW	Colour
22045648468	8	6	32.7	14	Blue

Cat. No.	OD inch	OD1 inch	L mm	SW	Colour
22045605048	⅝"	¼"	32.7	14	Navy Blue
22245605043	⅝"	¼"	32.7	14	

Note: Packing 25 unit

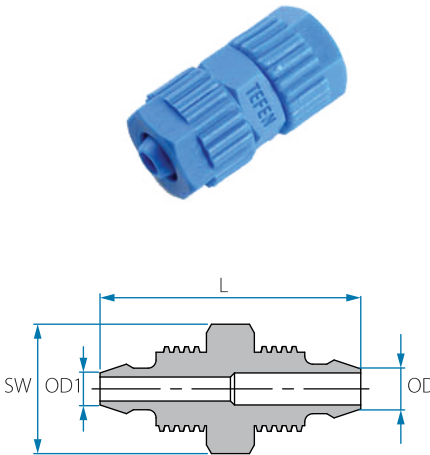

Cat. No.	OD inch	M (BSPT)	L mm	SW	Colour
22046804028	¼"	⅛"	27.5	13	Navy Blue
22046804048	¼"	¼"	29.7	15	
22046804068	¼"	⅜"	32.5	17	
22046804088	¼"	½"	35.5	22	
22046804128	¼"	¾"	36.6	27	
22046805028	⅝"	⅛"	27.6	13	
22046805048	⅝"	¼"	29.5	14	
22046805068	⅝"	⅜"	31.4	17	
22046806048	⅝"	¼"	35.8	17	
22046806068	⅝"	⅜"	35.8	17	
22046806088	⅝"	½"	38.9	22	
22046806128	⅝"	¾"	39.7	27	
22046808048	½"	¼"	37.3	17	
22046808068	½"	⅜"	37.3	17	
22046808088	½"	½"	40.1	22	
22046808128	½"	¾"	40.1	27	
22046804041	¼"	¼"	29.7	15	White
22046804081	¼"	½"	35.5	22	
22046804121	¼"	¾"	36.6	27	

Note: Packing 25 unit

Fittings - Barb Block


REINFORCED POLYPROPYLENE



Working pressure
Up to 14 BAR
(200 psi) at 20 °C




Temperature
4 °C - 90 °C
(subject to application)

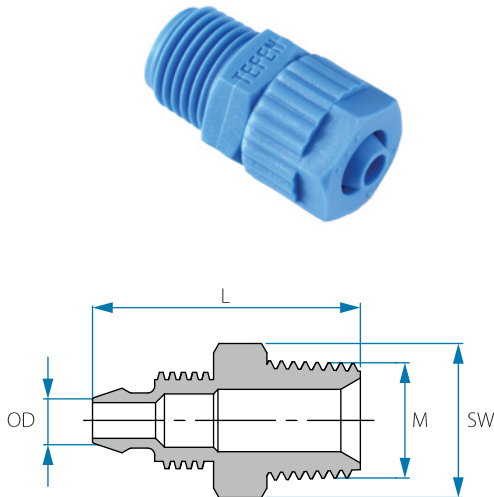

NPT Male Connector

Cat. No.	OD inch	M (NPT)	L mm	SW	Colour
22246804023	1/4"	1/8"	29,4	11	Gray
22246804043	1/4"	1/4"	34,0	14	
22246804063	1/4"	3/8"	35,1	17	
22246804083	1/4"	1/2"	40,2	22	
22246804123	1/4"	3/4"	41,0	27	
22246805023	5/16"	1/8"	29,4	11	
22246805043	5/16"	1/4"	34,0	14	
22246805063	5/16"	3/8"	35,1	17	
22246805083	5/16"	1/2"	40,2	22	
22246805123	5/16"	3/4"	41,1	27	
22246806043	3/8"	1/4"	37,6	14	
22246806063	3/8"	3/8"	38,6	17	
22246806083	3/8"	1/2"	43,7	22	
22246806123	3/8"	3/4"	44,4	27	
22246808043	1/2"	1/4"	38,8	14	
22246808063	1/2"	3/8"	40,0	17	
22246808083	1/2"	1/2"	45,0	22	
22246808123	1/2"	3/4"	45,7	27	

Note: Packing 25 unit

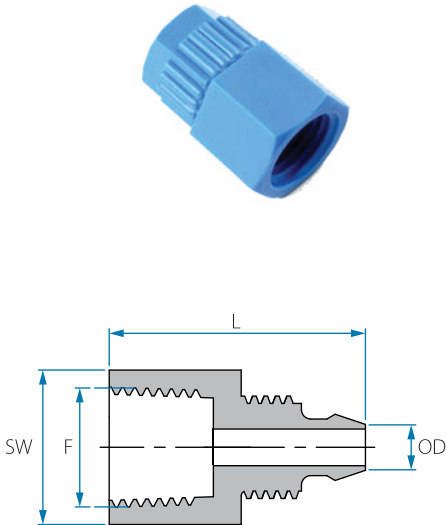

BSPT Female Connector

Cat. No.	OD mm	F (BSPT)	L mm	SW	Colour
22046646028	6	1/8"	26,3	14	Blue
22046646048	6	1/4"	27,8	17	
22046648028	8	1/8"	26,3	14	
22046648048	8	1/4"	28,0	17	
22046648068	8	3/8"	30,6	22	
22046648088	8	1/2"	32,5	26	
22046648548	8	M14X1,5	28,1	17	
22046650048	10	1/4"	31,7	17	
22046650068	10	3/8"	33,0	22	
22046650088	10	1/2"	35,4	26	

Cat. No.	OD inch	F (BSPT)	L mm	SW	Colour
22046604028	1/4"	1/8"	26,3	14	Navy Blue
22046604048	1/4"	1/4"	27,8	17	
22046605028	5/16"	1/8"	26,3	14	
22046605048	5/16"	1/4"	28,0	17	
22046605068	5/16"	3/8"	30,6	22	
22046605088	5/16"	1/2"	32,5	26	
22046606048	3/8"	1/4"	31,7	17	
22046606068	3/8"	3/8"	33,0	22	
22046606088	3/8"	1/2"	35,4	26	

Note: Packing 25 unit

NPT Female Connector

Cat. No.	OD inch	F (NPT)	L mm	SW	Colour
22246604023	1/4"	1/8"	26,3	14	Gray
22246605023	5/16"	1/8"	26,3	14	
22246605043	5/16"	1/4"	32,1	17	
22246605063	5/16"	3/8"	32,2	22	
22246605083	5/16"	1/2"	37,5	27	
22246606043	3/8"	1/4"	34,5	17	
22246606063	3/8"	3/8"	34,5	22	
22246606083	3/8"	1/2"	38,0	27	

Note: Packing 25 unit

Fittings - Barb Block

REINFORCED POLYPROPYLENE



Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
4 °C - 90 °C
(subject to application)

Union Elbow

Cat. No.	OD mm	L mm	Colour
22046546008	6	274	Blue
22046548008	8	274	
22046552008	12	40.5	
22046548002	8	274	Black

Cat. No.	OD inch	L mm	Colour
22046504008	¼"	274	Navy Blue
22046505008	⅝"	274	
22046508008	½"	40.5	
22046508002	½"	40.5	Black

Note: Packing 25 unit




Cat. No.	OD inch	L mm	Colour
22246504003	¼"	275	Gray
22246505003	⅝"	275	
22246508003	½"	40.5	

Note: Packing 25 unit

Reducing Elbow

Cat. No.	OD mm	OD1 mm	L mm	Colour
22045748468	8	6	273	Blue

Note: Packing 25 unit



BSPT Male Elbow

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
22046946028	6	⅛"	276	22.4	Blue
22046946048	6	¼"	276	26.8	
22046948028	8	⅛"	276	26.8	
22046948048	8	¼"	276	26.8	
22046948068	8	⅜"	28.1	29.4	
22046952048	12	¼"	40.3	31.7	
22046952068	12	⅜"	40.3	32.0	
22046952088	12	½"	40.3	36.0	
22046946022	6	⅛"	276	22.4	Black
22046948022	8	⅛"	276	26.8	

Cat. No.	OD inch	M (BSPT)	L mm	L1 mm	Colour
22046904028	¼"	⅛"	276	22.4	Navy Blue
22046904048	¼"	¼"	276	26.8	
22046905028	⅝"	⅛"	276	26.8	
22046905048	⅝"	¼"	276	26.8	
22046905068	⅝"	⅜"	28.1	29.4	
22046908048	½"	¼"	40.3	31.7	
22046908068	½"	⅜"	40.3	32.0	
22046908088	½"	½"	40.3	36.0	
22046908082	½"	½"	40.3	36.0	Black
22046904041	¼"	¼"	26.7	26.8	
					White

Note: Packing 25 unit

NPT Male Elbow

Cat. No.	OD inch	M (NPT)	L mm	L1 mm	Colour
22246904023	¼"	⅛"	275	24.0	Gray
22246904043	¼"	¼"	275	29.0	
22246905023	⅝"	⅛"	275	24.0	
22246905043	⅝"	¼"	275	28.9	


Note: Packing 25 unit

Fittings - Barb Block

REINFORCED POLYPROPYLENE

 Working pressure
Up to 14 BAR
(200 psi) at 20 °C


 Temperature
4 °C - 90 °C
(subject to application)



BSPT Female Elbow

Cat. No.	OD mm	F (BSPT)	L mm	L1 mm	Colour
22046046028	6	1/8"	25.1	27.3	Blue
22046046048	6	1/4"	27.0	27.3	
22046048048	8	1/4"	27.0	27.3	
22046046022	6	1/8"	25.1	27.3	Black
22046046042	6	1/4"	27.0	27.3	
22046048042	8	1/4"	27.0	27.3	

Note: Packing 25 unit

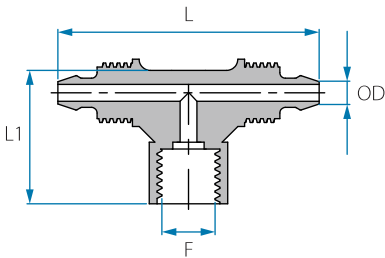


BSPT Female Branch T

Cat. No.	OD mm	F (BSPT)	L mm	L1 mm	Colour
22047346028	6	1/8"	46.6	25.0	Blue
22047348048	8	1/4"	46.8	27.2	

Cat. No.	OD inch	F (BSPT)	L mm	L1 mm	Colour
22047304028	1/4"	1/8"	46.6	25.0	Navy Blue
22047305048	5/16"	1/4"	46.8	27.2	

Note: Packing 25 unit

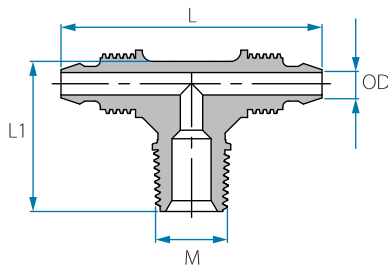

BSPT Male Branch T

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
22047146028	6	1/8"	46.8	22.6	Blue
22047146048	6	1/4"	46.8	26.8	
22047148028	8	1/8"	46.8	22.6	
22047148048	8	1/4"	46.8	26.8	
22047148068	8	3/8"	47.2	29.4	
22047152048	12	1/4"	67.0	31.6	
22047152068	12	3/8"	67.0	32.0	Black
22047152088	12	1/2"	67.0	36.0	
22047146042	6	1/4"	46.8	26.8	
22047148022	8	1/8"	46.8	22.6	
22047148042	8	1/4"	46.8	26.8	

Cat. No.	OD inch	M (BSPT)	L mm	L1 mm	Colour
22047104028	1/4"	1/8"	46.8	22.6	Navy Blue
22047104048	1/4"	1/4"	46.8	26.8	
22047105028	5/16"	1/8"	46.8	22.6	
22047105048	5/16"	1/4"	46.8	26.8	
22047105068	5/16"	3/8"	47.2	29.4	
22047108048	1/2"	1/4"	67.0	31.6	
22047108068	1/2"	3/8"	67.0	32.0	
22047104041	1/4"	1/4"	46.8	26.8	White

Note: Packing 25 unit

NPT Male Branch T

Cat. No.	OD inch	M (NPT)	L mm	L1 mm	Colour
22247104023	1/4"	1/8"	47.7	24.1	Grey
22247104043	1/4"	1/4"	46.6	28.9	
22247105023	5/16"	1/8"	46.7	24.1	
22247105043	5/16"	1/4"	46.7	28.9	
22247108063	1/2"	3/8"	66.8	32.0	
22247108083	1/2"	1/2"	66.8	36.1	Black
22247105022	5/16"	1/8"	46.7	24.1	


Note: Packing 25 unit

Fittings - Barb Block

REINFORCED POLYPROPYLENE

Working pressure
Up to 14 BAR
(200 psi) at 20 °C

Temperature
4 °C - 90 °C
(subject to application)

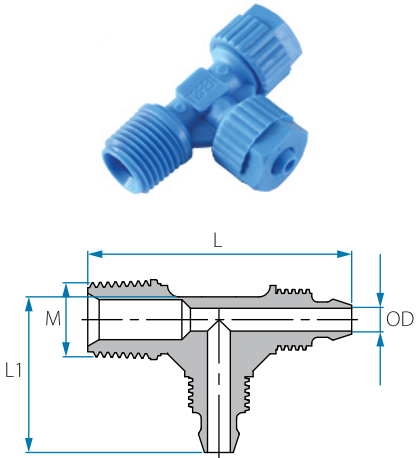

BSPT Male Run T

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
22047246028	6	1/8"	41,9	27,5	Blue
22047246048	6	1/4"	46,2	27,5	
22047248028	8	1/8"	41,9	27,5	
22047248048	8	1/4"	46,2	27,5	
22047248068	8	3/8"	58,8	43,2	
22047252048	12	1/4"	57,7	40,3	
22047252068	12	3/8"	59,0	40,5	
22047252088	12	1/2"	62,7	40,4	

Cat. No.	OD inch	M (BSPT)	L mm	L1 mm	Colour
22047204028	1/4"	1/8"	41,9	27,5	Navy Blue
22047204048	1/4"	1/4"	46,2	27,5	
22047205028	5/16"	1/8"	41,9	27,5	
22047205048	5/16"	1/4"	46,2	27,5	
22047205068	5/16"	3/8"	58,8	43,2	
22047208048	1/2"	1/4"	57,7	40,3	
22047208068	1/2"	3/8"	59,0	40,5	
22047208088	1/2"	1/2"	62,7	40,4	
22047204041	1/4"	1/4"	46,2	27,5	White

Note: Packing 25 unit

NPT Male Run T



Cat. No.	OD inch	M (NPT)	L mm	L1 mm	Colour
22247204023	1/4"	1/8"	43,4	27,4	Grey
22247204043	1/4"	1/4"	48,2	27,4	
22247205023	5/16"	1/8"	43,5	27,4	
22247205043	5/16"	1/4"	48,3	27,4	
22247205063	5/16"	3/8"	56,1	40,2	
22247208023	1/2"	1/8"	55,5	27,2	

Note: Packing 25 unit

BSPT Male T - 2 threads

Cat. No.	OD mm	M inch	M1 inch	L mm	L1 mm	Colour
22047802048	8	1/4"	1/8"	46,2	22,6	Blue

Note: Packing 25 unit

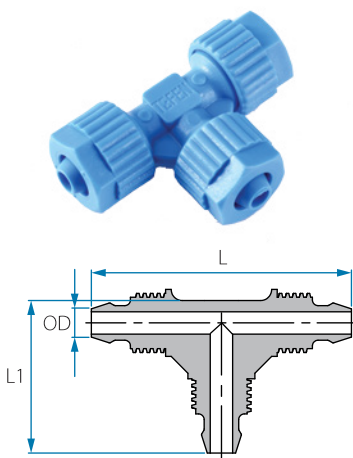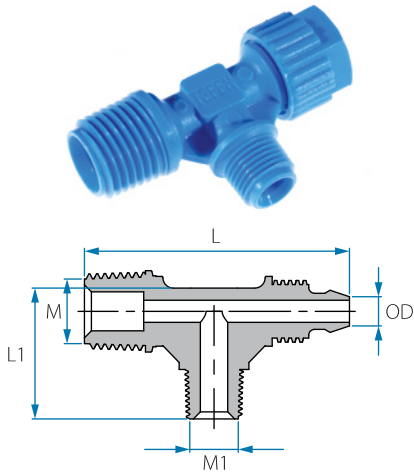

Union T

Cat. No.	OD mm	L mm	L1 mm	Colour
22046446468	6	46,8	27,5	Blue
22046448488	8	46,8	27,5	
22046452528	12	67,1	40,4	

Cat. No.	OD inch	L mm	L1 mm	Colour
22046404041	1/4"	46,8	27,5	White
22046404048	1/4"	46,8	27,5	Navy Blue
22046405058	5/16"	46,8	27,5	
22046408088	1/2"	67,1	40,4	Black
22046404042	1/4"	46,8	27,5	
22046408082	1/2"	67,1	40,4	Grey
22246404043	1/4"	46,7	27,4	
22246405053	5/16"	46,7	27,4	
22246408083	1/2"	67,0	40,4	

Note: Packing 25 unit

Reducing T

Cat. No.	OD mm	OD1	L mm	L1 mm	Colour
22045846488	6	8	46,8	27,4	Blue
22045848468	8	6	46,8	27,4	

Note: Packing 25 unit

